


  
**AIRSTAR**

**SIROCCO 2-S**  
**150W HI**

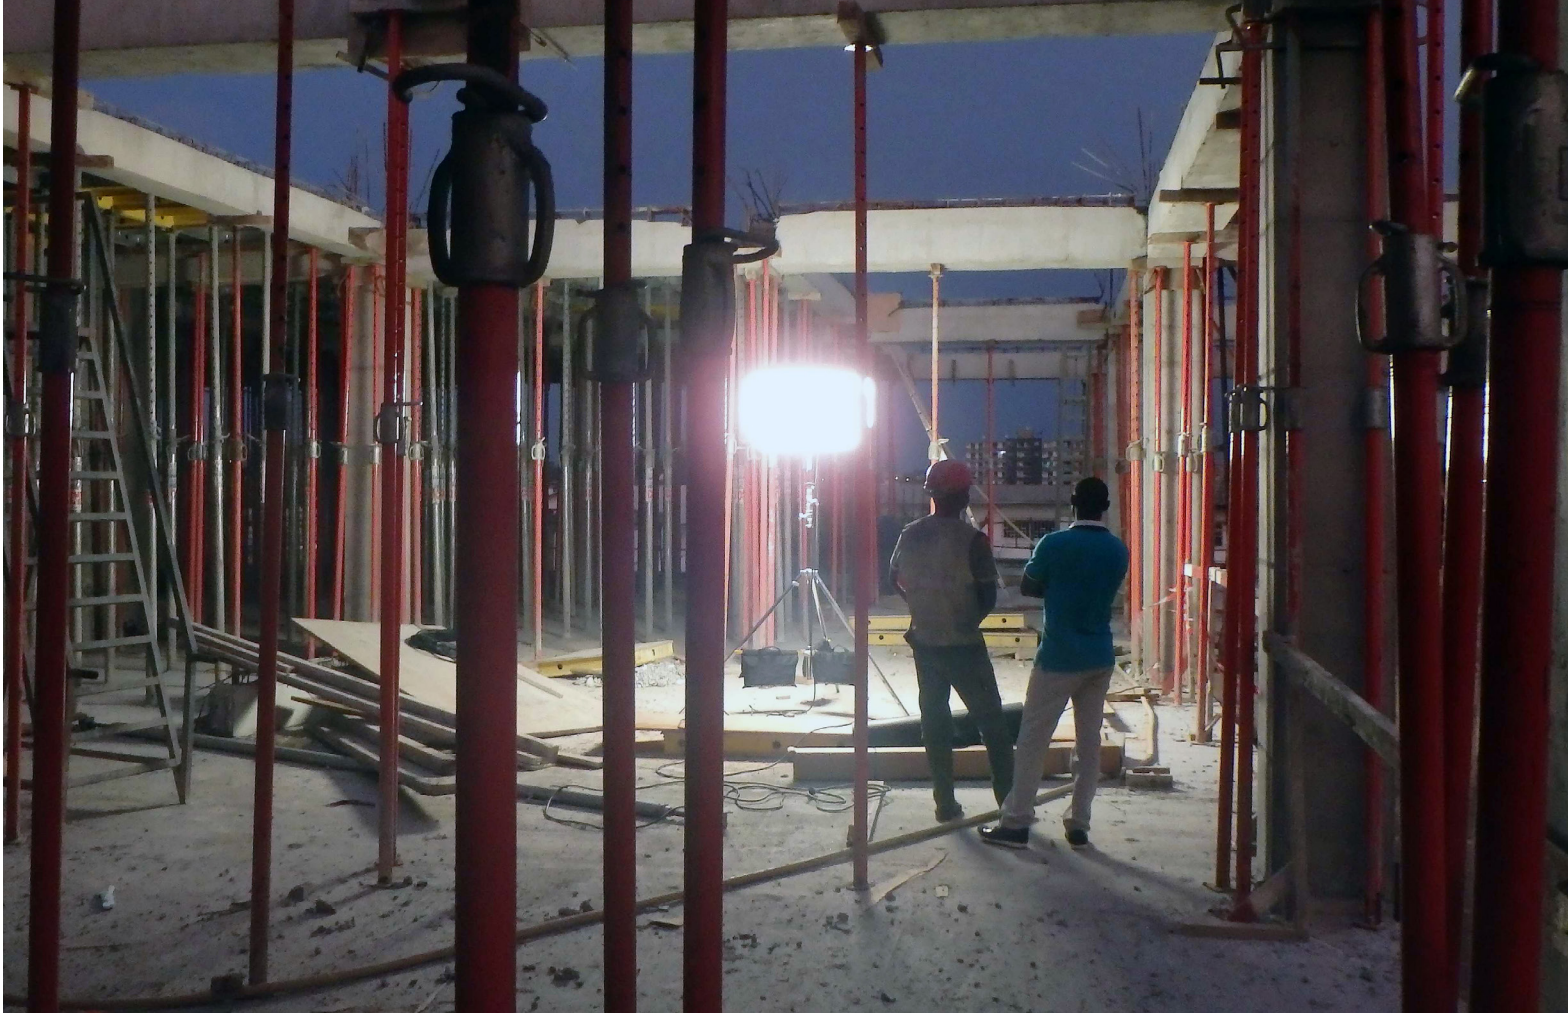

**MAIN FEATURES**

- Self-inflating lighting balloon
- Powerful and reliable lighting
- Small size
- Pro-pack version

**STRENGTHS**

- Optimized power-to-size ratio
- Portable
- Small and light generators (easy to handle)
- Reinforced structure

**APPLICATIONS**


- Industrial maintenance
- Small construction works
- Roadworks, small and medium building sites
- Logistical lighting
- Security lighting

# SIROCCO 2-S 150W HI



## LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	2925 sq/ft
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	441 sq/ft
Light under the balloon (2.5 m high)	22.5 fc
Maximum lumen	14 550 lm
Color temperature: NEUTRAL	3500° - 4500°K

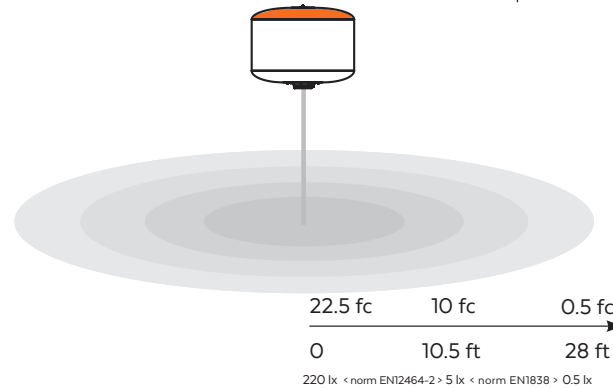

## TECHNICAL DATA

Lamps	1 x 150 W HI EP or M102
Average lamps life*	12 000 h
Efficiency	87 lm/W
Type of lamp socket	E27 or E26
Maximum power	170 W
Available voltage	100-120 V
Ballast	1 x 150 W - Integrated for increased mobility
Restrike time	- 7 min
Main power supply or	1 kVA generator
Envelope options	multiple envelope colors, without reflector or with reverse reflector

\*Under normal conditions of use


## SAFETY

Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP54
Temperature control system	Protection sensor
Wind resistance	49 mph

## DIMENSIONS & PACKAGING

### Metal storage box (integrated handle)


Total weight without stand	13 lbs
Net weight balloon only	6.5 lbs

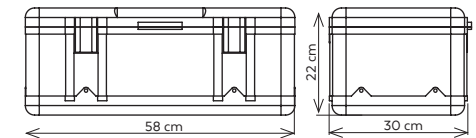


Full set lighting balloon with one repair patch kit, one user manual and one glove, all in a metal box, stand separately

### Pro-Pack (integrated handle and wheels)

Total weight with stand	62 lbs
Net weight balloon only	6.5 lbs

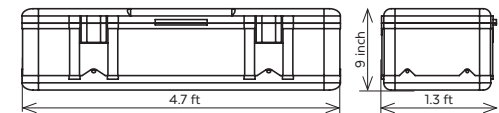

1 lighting balloon with 1 repair patch kit, 1 user manual and 1 glove, P400TA stand, all in a black hard case

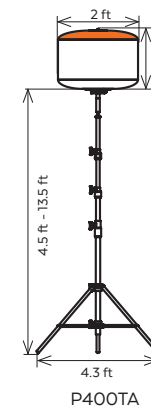

# AIRSTAR