

# AIRSTAR

## SIROCCO 2-S 300W HI



### MAIN FEATURES

- Self-inflating lighting balloon
- Powerful and reliable lighting
- Small size
- Pro-pack option

### STRENGTHS

- Excellent efficiency
- Competitive positioning
- Small and light generators (easy to handle)
- Low voltage with power converter
- Strong structure and materials

### APPLICATIONS



- Industrial maintenance
- Small construction works
- Roadworks, small and medium building sites
- Logistical lighting
- Security lighting

# SIROCCO 2-S 300W HI



## LIGHTING DATA

Open core area lighting requirement (EN1838 norm)	5850 sq/ft
Very low risk area lighting requirement for safety and security (EN12464-2 norm)	900 sq/ft
Light under the balloon (8 ft high)	40 fc
Maximum lumen	29 100 lm
Color temperature: NEUTRAL	4 000°K

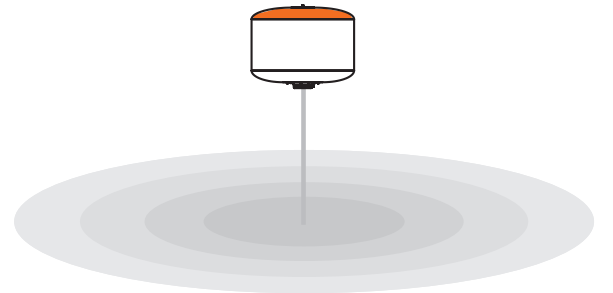

## TECHNICAL DATA

Lamps	2 x 150 W HI EP or M102
Average lamps life*	12 000 h
Efficiency	97 lm/W
Type of lamp socket	E27 or E26
Maximum power	345 W
Available voltage	120 V / 50-60 Hz
Ballast	2 x 150 W - Integrated for increased mobility
Restrike time	~ 7 min
Envelope options	multiple envelope colors, without reflector or with reverse reflector
Main power supply or 1 kVA generator	

\*Under normal conditions of use


## SAFETY

Flame-retardant fabric	
Silver reflector to improve highlight luminance below the balloon and avoid light pollution	
Rain and dust proof material	IP54
Temperature control system	Protection sensor
Wind resistance	49 mph


## DIMENSIONS & PACKAGING

### Metal storage box (integrated handle)

Total weight without stand	18 lbs
Net weight balloon only	10 lbs

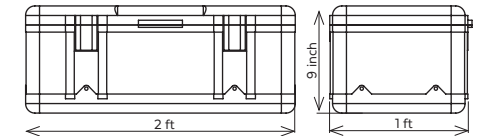


Full set lighting balloon with one repair patch kit, one user manual and one glove, all in a metal box, stand separately

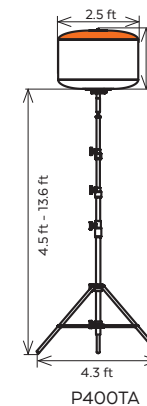

### Pro-Pack (integrated handle and wheels)

Total weight with stand	86 lbs
Net weight balloon only	10 lbs



1 lighting balloon with 1 repair patch kit, 1 user manual and 1 glove, P400TA stand, all in a black hard case

