

sirocco flex M|H 1,000 W / 110,000 lm

flex by Airstar


The envelope of this unit is constructed from woven material with an internal, rigid pole system, which doesn't require a fan for inflation. Intended for permanent or semi-permanent use and provides a higher wind resistance.

standard version



lighting data

| | |
|--|------------------------|
| Open core area lighting requirement (.5 fc U.S.) | 23,800 ft ² |
| Very low risk area lighting requirement for safety and security (10 fc U.S.) | 1,810 ft ² |
| Light under the balloon (13 ft high) | 72.5 fc |
| Maximum lumen | 110,000 lm |
| Color temperature: neutral | 4,000 - 4,500 K |

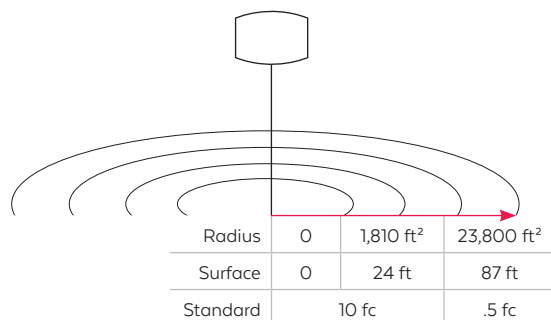

technical data

| | |
|---------------------|---|
| Lamps | 1 x 1,000 W HI-T |
| Average lamp life* | 8,000 h |
| Efficiency | 110 lm/W |
| Type of lamp holder | E40 |
| Maximum power | 1,000 W |
| Available voltage | 110 - 120 / 220-240 V / 50 Hz |
| Ballast | 1 x 1,000 W |
| Restrike time | ~ 12 min |
| Power supply | main power or 2 kVA generator |
| Envelope options | multiple envelope colors, without reflector or with reverse reflector |

* Under normal conditions of use

dimensions and packaging

| | |
|--|---------------------|
| Envelope size | ø 4 ft / h 2 ft |
| P500TA stand height | from 5 to 18 ft |
| Net weight of the balloon | 22 lbs |
| PVC cylinder case | |
| Cylinder case dimensions | L 39.4 x w 10.24 in |
| Content: full set lighting balloon (without stand), 1 lamp, 1 user manual, 1 glove, 1 repair patch kit | |
| Net weight without stand | 17 lbs |

safety

| | |
|---|--------|
| Flame-retardant fabric | |
| Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution | |
| Rain and dust proof material | IP54 |
| Wind resistance of the balloon | 60 mph |

Airstar America Inc.

Tel: 1 (800) 217-9001

www.airstar-light.us



AIRSTAR