


sirocco HA 2,000 W / 54,000 lm

standard version



lighting data

Open core area lighting requirement (.5 fc U.S.)	16,000 ft ²
Very low risk area lighting requirement for safety and security (10 fc U.S.)	710 ft ²
Light under the balloon (13 ft high)	37 fc
Maximum lumen	54,000 lm
Color temperature: warm	3,200 K

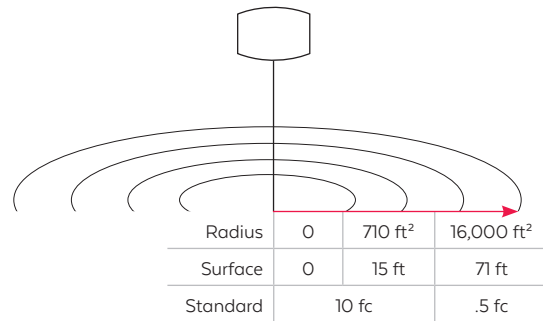

technical data

Lamps	2 x 1,000 W HA
Average lamp life*	300 h
Efficiency	27 lm/W
Type of lamp holder	R7S
Maximum power	2,000 W
Available voltage	110/120 - 220/240 V / 50-60 Hz
Restrike time	instant
Power supply	main power or 3 kVA generator
Envelope options	multiple envelope colors, without reflector or with reverse reflector

* Under normal conditions of use

dimensions and packaging

Envelope size	ø 3 ft / h 2 ft
P500TA stand height	from 5 to 18 ft
Net weight of the balloon	13 lbs
PVC cylinder case	
Cylinder case dimensions	L 39.4 x w 10.24 in
Content: full set lighting balloon (without stand), 2 lamps, 1 user manual, 1 glove, 1 repair patch kit	
Net weight without stand	17 lbs

safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	IP54
Electrical protection	integrated fuse + breaker
Eye protection	Pressure sensor
Wind resistance of the balloon	60 mph

Airstar America Inc.

Tel: 1 (800) 217-9001

www.airstar-light.us



AIRSTAR