


sirocco 120 W LED / 12,300 lm / 48 V

standard version



lighting data

Open core area lighting requirement (.5 fc U.S.)	3,425 ft ²
Very low risk area lighting requirement for safety and security (10 fc U.S.)	205 ft ²
Light under the balloon (7.6 ft high)	24 fc
Maximum lumen	12,300 lm
Color temperature: neutral	4,750 K

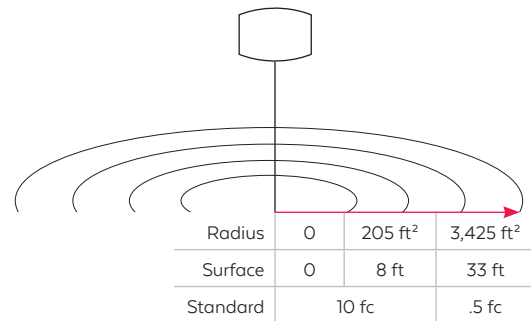

pro-pack version



dimensions and packaging

Envelope size	ø 23.6 in / h 17.7 in
P400TA stand height	from 4 ft to 13 ft
Stand height (pro-pack version)	7.5 ft
Net weight of the balloon	7 lbs

Standard version : sirocco s box

Case dimensions	L 23 x w 12 x h 9 in
Content: full set lighting balloon with LED (without stand), user manual, 1 glove, 1 repair patch kit	
Net weight without stand	17 lbs

Pro-pack version (handle and wheels)

Case dimensions	L 26 x w 21 x h 11 in
Content: Pro case, light assy., pole, battery, charger	
Net weight with stand	44 lbs

technical data

Light source	12 x 10 W LED			
Average LED life*	40,000 h			
Efficiency	100 lm/W			
LED configuration	10 W LED COB			
Maximum power	125 W			
Available voltage	48 V DC			
Dimmable	100 %	66 %	33 %	flash mode
Battery lifetime	4 h	6 h	8 h	8 h
Restrike time	instant			
Power supply	battery - lithium 48 V			
Envelope options	multiple envelope colors, without reflector or with reverse reflector			

* Under normal conditions of use

safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	IP54

Airstar America Inc.

Tel: 1 (800) 217-9001

www.airstar-light.us

