



# sirocco 240 W LED / 24,000 lm 48 V

## standard version

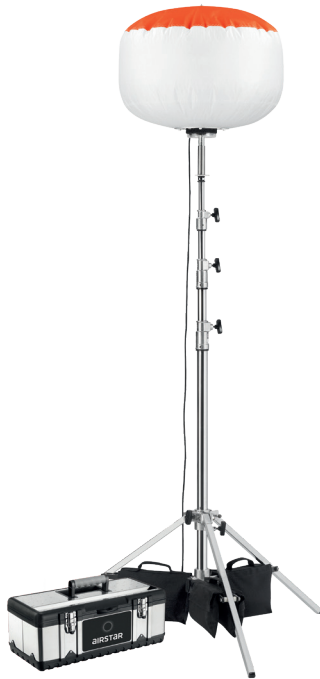

## lighting data

Open core area lighting requirement (.5 fc U.S.)	6,650 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (10 fc U.S.)	260 ft <sup>2</sup>
Light under the balloon (13 ft high)	12 fc
Maximum lumen	24,000 lm
Color temperature: daylight	6,000 K

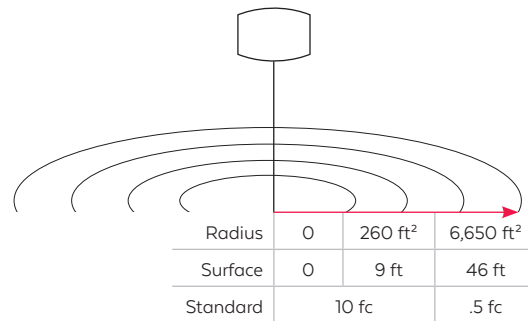

## pro-pack version



## dimensions and packaging

Envelope size	ø 29.5 in / h 23.6 in
P400TA stand height	from 4 ft to 13 ft
Net weight of the balloon	8 lbs
<b>Standard version : sirocco S box</b>	
Case dimensions	L 23 x w 12 x h 9 in
Content: full set lighting balloon with LED (without stand), inverter, user manual, 1 glove, 1 repair patch kit	
Net weight without stand	23 lbs
<b>Pro-pack version (handle and wheels)</b>	
Case dimensions	L 56 x w 17 x h 12 in
Content: Pro case, light assy., 14' stand, 2 batteries, 2 chargers, inverter, 3 sand bags	
Net weight with stand	88 lbs

## technical data

Light source	6 x 4 x 10 W LED			
Average LED life*	40,000 h			
Efficiency	100 lm/W			
LED configuration	10 W LED COB			
Maximum power	240 W			
Available voltage	48 V DC			
Dimmable	100 %	66 %	33 %	flash mode
Battery lifetime	4 h	6 h	8 h	8 h
Restrike time	instant			
Power supply	48 V battery lithium / 120 v			
Envelope options	multiple envelope colors, without reflector or with reverse reflector			

\* Under normal conditions of use

## safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	IP54

**Airstar America Inc.**

Tel: 1 (800) 217-9001

[www.airstar-light.us](http://www.airstar-light.us)

