


# sirocco 400 W LED / 50,000 lm

## standard version



## lighting data

Open core area lighting requirement (.5 fc U.S.)	12,450 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (10 fc U.S.)	620 ft <sup>2</sup>
Light under the balloon (13 ft high)	25.5 fc
Maximum lumen	50,000 lm
Color temperature: daylight	6,000 K

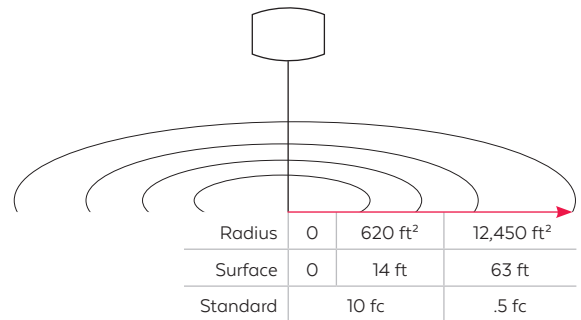

## dimensions and packaging

Envelope size	ø 36 in / h 24 in
P500TA stand height	from 5 to 18 ft
Net weight of the balloon	15.4 lbs
<b>PVC cylinder case</b>	
Cylinder case dimensions	L 39.4 x w 10.24 in
Content: full set lighting balloon with LED (without stand), 1 user manual, 1 glove, 1 repair patch kit	
Net weight without stand	22 lbs

## technical data

Light source	4 x 100 W LED
Average LED life*	50,000 h
Efficiency	125 lm/W
LED configuration	4 x independent panels [Driver + LED] Quick and easy to replace (4 screws)
Maximum power	400 W
Available voltage	100-120-230 V / 50-60 Hz
Restrike time	instant
Power supply	main power or 1 kVA generator
Envelope options	multiple envelope colors, without reflector or with reverse reflector

\* Under normal conditions of use

## safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	
Electrical protection	fuse
Wind resistance of the balloon	62 mph

**Airstar America Inc.**

Tel: 1 (800) 217-9001

[www.airstar-light.us](http://www.airstar-light.us)



**AIRSTAR**