


# sirocco 60 W LED / 120 W LED (12 V / 24 V) DC


## extra low voltage supply

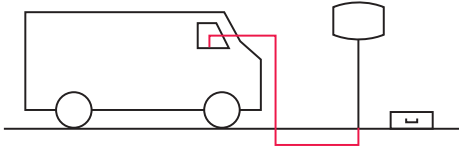

## lighting data

Open core area lighting requirement (.5 fc U.S.)	455/2,125 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (10 fc U.S.)	340/680 ft <sup>2</sup>
Light under the balloon (7.6 ft high)	6/11 fc
Maximum lumen	6,000/12,000 lm
Color temperature: neutral	4,750 K

## standard version

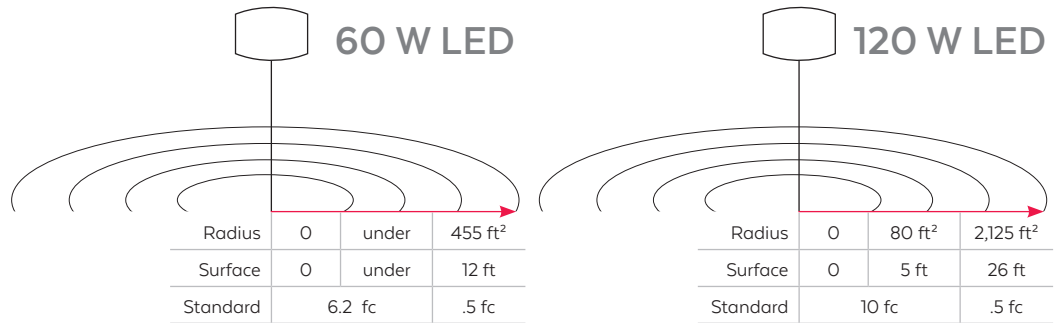

## technical data

Light source	6 x 10 / 12 x 10 W LED
Average LED life*	40,000 h
Efficiency	100 lm/W
LED configuration	6 LED COB panels (powered by 6 drivers)
Maximum power	60 W
Connector	cigarette power outlet / battery clips
Available voltage	min. 12 V DC / max. 24 V DC
Restrike time	instant
Power supply option	battery 12 V or 48 V
Envelope options	multiple envelope colors, without reflector or with reverse reflector

\* Under normal conditions of use

## dimensions and packaging

Envelope size	ø 24 in / h 16 in
P400TA stand height	from 4 ft to 13 ft
Net weight of the balloon	7 lbs
<b>Metallic case (integrated handle)</b>	
Case dimensions	L 23 x w 12 x h 9 in
Content: full set lighting balloon with LED (without stand), 1 user manual, 1 glove, 1 repair patch kit	
Net weight without stand	15 lbs

## safety

Safety low voltage power supply (< 60 V DC)	12 V
Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	IP54

Airstar America Inc.

Tel: 1 (800) 217-9001

www.airstar-light.us

