


sirocco 60 W LED / 6,150 lm / 48 V

standard version



lighting data

Open core area lighting requirement (.5 fc U.S.)	910 ft ²
Very low risk area lighting requirement for safety and security (10 fc U.S.)	80 ft ²
Light under the balloon (7.6 ft high)	12 fc
Maximum lumen	6,150 lm
Color temperature: neutral	4,750 K

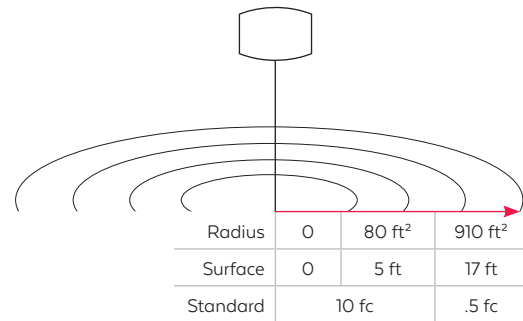

pro-pack version



technical data

Light source	6 x 10 W LED			
Average LED life*	40,000 h			
Efficiency	100 lm/W			
LED configuration	6 x LED panels (powered by 2 drivers)			
Maximum power	60 W			
Available voltage	48 VDC			
Dimmable	100 %	66 %	33 %	flash mode
Battery lifetime	8 h	12 h	16 h	16 h
Restrike time	instant			
Power supply	battery -lithium 48 V			
Envelope options	multiple envelope colors, without reflector or with reverse reflector			

* Under normal conditions of use

dimensions and packaging

Envelope size	ø 24 in / h 18 in
Stand height (pro-pack version)	7.6 ft
Net weight of the balloon	7 lbs
Pro-pack version (handle and wheels)	
Case dimensions	L 26 x w 21 x h 11 in
Content: Pro case, light assy., pole, battery, charger	
Net weight with stand	44 lbs

safety

Safety low voltage power supply (< 60 VDC)	48 V
Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	IP54

Airstar America Inc.

Tel: 1 (800) 217-9001

www.airstar-light.us

