


sirocco M|H 1,000 W / 110,000 lm

standard version



lighting data

Open core area lighting requirement (.5 fc U.S.)	23,800 ft ²
Very low risk area lighting requirement for safety and security (10 fc U.S.)	1,810 ft ²
Light under the balloon (13 ft high)	49.8 fc
Maximum lumen	110,000 lm
Color temperature: neutral	4,000 K

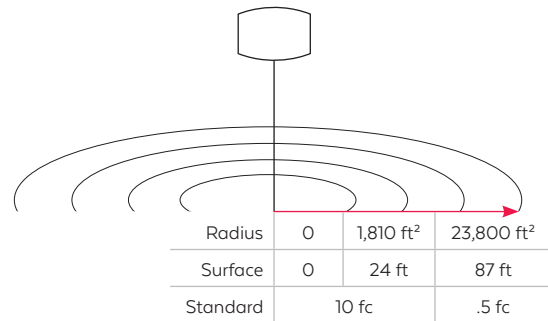

technical data

Lamps	1 x 1,000 W HI-T
Average lamp life*	8,000 h
Efficiency	110 lm/W
Type of lamp holder	E40
Maximum power	1,280 W
Available voltage	110/120 - 220/240 V / 50 Hz
Restrike time	~ 10 min
Power supply	main power or 2 kVA generator
Envelope options	multiple envelope colors, without reflector or with reverse reflector

* Under normal conditions of use

dimensions and packaging

Envelope size	ø 4 ft / h 2.29 ft
P500TA stand height	from 5 to 18 ft
Net weight of the balloon	22 lbs
Ballast	26 lbs
PVC cylinder case	
Cylinder case dimensions	L 39.4 x w 10.24 in
Content: full set lighting balloon (without stand), 1 lamp, 1 user manual, 1 glove, 1 repair patch kit	
Net weight without stand	28 lbs

safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	IP54
Thermal protection system	
Eye protection	Pressure sensor
Wind resistance of the balloon	50 mph

Airstar America Inc.

Tel: 1 (800) 217-9001

www.airstar-light.us



AIRSTAR