

# Sirocco 300



**22,000**  
LUMENS



**5.0 lbs 2.3 kg**  
LIGHTWEIGHT



**5,000 K**  
DAYLIGHT COLOR




Power  
Switch



## Lighting Data

Light Engine	Airstar LED Matrix : 4 x 5,500 lm
Maximum Lumens	22,000 lm
Average LED Life *	50,000 h
Color Temperature: Daylight	5,000 K
CRI	70
Light under the balloon ** (13 ft high   4 m)	10.4 fc / 112 lx

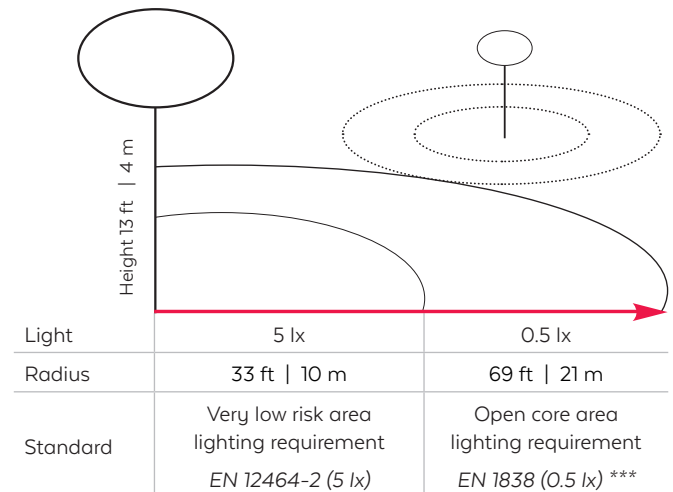

\* Under normal conditions of use \*\* Lenticular Envelope \*\*\* Standard Envelope

## Weight and Dimensions

Net weight of the balloon	5.9 lbs   2.8 kg
Envelope size	ø 23 in / h 15 in ø 60 cm / h 37 cm

## Packaging

Included: Lighting balloon with 1x standard envelope (without stand), 1x power cord (30 ft | 9.2 m), 1x quick-start guide, 1x envelope repair kit

Transport bag	19 x 10 x 10 in (l*w*h) 47 x 25 x 25 cm (l*w*h)
Transport gross weight	Less than 15.4 lbs   7 kg

## Recommended Accessories

Stand 12 ft	Height from 49 in (126 cm) to 157 in (400 cm) Weight 15 lbs   6.7 kg
Sandbag	Weight (with sand): 25 lbs (x3 bags recommended)
Energy Pack	1.7 kWh - 10 hours battery life (PowerSwitch option)

### Main options



(Battery input 52 V & Backup power)

Provides flexibility in use and installation while ensuring safety (continuity in case of power failure) and bolstering security in work environments to avert accidents


Envelope options: Lenticular, reversed reflector, branded with logo, customized reflector color

## Technical Data

Wind resistance of the balloon	50 mph   80 km/h
Power consumption	160 W
Efficiency	138 lm/W
Voltage	100-240 VAC / 50-60 Hz
Battery voltage (PowerSwitch)	52 V
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

## Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons.  
Max Mesh range between two balloons: up to 109.3 yd - 100 m



4 light animations available



AIRSTAR  
LIGHT



**Airstar America Inc.**

Tel: 1 (800) 217-9001

[www.airstar-light.us](http://www.airstar-light.us)



**aIRSTAR**