

# Sirocco 300 ProPack



**22,000**  
LUMENS



**5.0 lbs 2.3 kg**  
LIGHTWEIGHT



**5,000 K**  
DAYLIGHT COLOR



**12**  
HRS



## Weight and Dimensions

Net weight of the balloon	5 lbs   2.3 kg
Envelope size	ø 23 in / h 15 in ø 60 cm / h 37 cm
Telescopic column	Up to 7.2 ft (2.2 m) Weight 3.5 lb (1.6 kg)

## Packaging


Included in the transport case: Lighting balloon with 1x standard envelope with telescopic column, 1x 52V battery, 1x battery charger, 1x quick-start guide, 1x envelope repair patch kit	
Transport case	26 x 20 x 10 in (l*w*h) 67 x 51 x 26 cm (l*w*h)
Transport gross weight	Less than 50 lbs (23 kg)

## Accessories & Main Options

Envelope options: Lenticular, reversed reflector, branded with logo, customized reflector color

## Lighting Data

Light Engine	Airstar LED Matrix : 4 x 5,500 lm
Maximum Lumens	22,000 lm
Average LED Life *	50,000 h
Color Temperature: Daylight	5,000 K
CRI	70
Light under the balloon ** (7.2 ft high   2.2 m)	32 fc / 345 lx

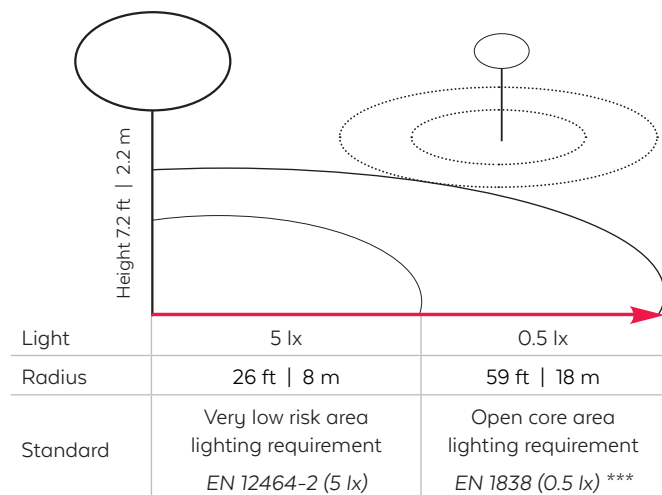


\* Under normal conditions of use \*\* Lenticular Envelope \*\*\* Standard Envelope

## Technical Data

Wind resistance of the balloon	50 mph   80 km/h
Power consumption	160 W
Efficiency	138 lm/W
Battery voltage	52 V
Mode	Full Efficient Eco
Battery life	4 h 6.5 h 12 h
Recommended battery	830 Wh (16 Ah) / 52 V
Certifications	IEC-60598-1, CE, IP54
Flame-retardant fabric	

## Airstar Light App

Control your balloons easily and remotely!



Control up to 250 balloons.  
Max Mesh range between two balloons: up to 109.3 yd - 100 m



4 light animations available



**Airstar America Inc.**  
Tel: 1 (800) 217-9001  
[www.airstar-light.us](http://www.airstar-light.us)



**aIRSTAR**