

compact LED presence lighting system*


sirocco LED 1,000 W / 120,000 lm lighting data



| Unit | 400 W LED | 600 W LED | 1,000 W LED |
|------------------------------|---|------------------------|------------------------|
| Maximum lumens | 50,000 lm | 75,000 lm | 120,000 lm |
| Maximum power | 400 W | 600 W | 1,000 W |
| Light coverage (.5 fc) | 12,450 ft ² | 20,100 ft ² | 32,047 ft ² |
| Light coverage (10 fc) | 620 ft ² | 1,385 ft ² | 1,810 ft ² |
| Light under balloon (13ft h) | 25.5 fc | 54.8 fc | 60.4 fc |
| Color temperature: | 6,000°K (Daylight) | | |
| Efficiency | 125 lm/W | | |
| Restrike time | Instant | | |
| Envelope options | multiple envelope colors, without reflector or with reverse reflector | | |

system dimensions and features

| | |
|------------------------------|---|
| Height range | up to 18 ft |
| Chassis construction | steel / made in the USA |
| Chassis dimensions | L 59.5 in W 26 in |
| Chassis weight | 178 lbs (without light) |
| Outriggers | extend to 2' beyond frame |
| Tires | 13 in foam-filled rubber tires |
| Cabinet: | lockable · ventilated |
| Fuel tank dimensions (6 gal) | L 19.3 in W 12.2 in H 10.2 in |
| Fuel tank capacity | 6 gallons & 12 gallons |
| Run time (varies per unit) | approx 50 - 75 hours on standard 2200W suitcase generator (Honda generator recommended) |

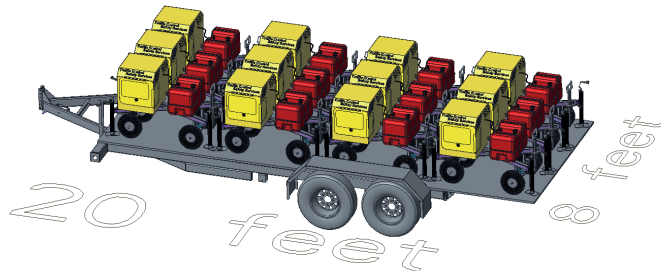

applications

- Replaces old traditional light towers
- Presence lighting for highway construction
- Roadway flagging
- Parking lot lighting
- Crash scene reconstruction lighting

system availability

*Complete system is not manufactured/sold by Airstar. Contact your regional sales representative for further information on purchasing.



Airstar America Inc.
Tel: 1 (800) 217-9001
www.airstar-light.us