

# sirocco LED 1,000 W / 120,000 lm

## standard version




## dimensions and packaging

Envelope size	ø 4 ft / h 2.62 ft
P600TA stand height	from 6 to 24 ft
Net weight of the balloon	28 lbs

PVC cylinder case	
Cylinder case dimensions	L 39.4 x w 10.24 in
Content: full set lighting balloon (without stand), 1 lamp, 1 user manual, 1 glove, 1 repair patch kit	

## lighting data

Open core area lighting requirement (.5 fc U.S.)	32,047 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (10 fc U.S.)	1,810 ft <sup>2</sup>
Light under the balloon (13 ft high)	60.4 fc
Maximum lumen	120,000 lm
Color temperature: daylight	6,000 K

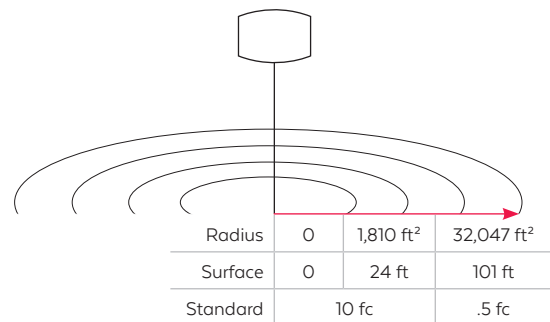

## technical data

Light source	10 x 100 W LED
Average LED life*	50,000 h
Efficiency	125 lm/W
LED configuration	10 x independent panels [Driver + LED]
Maximum power	1,000 W
Available voltage	110/120 - 220/240 V / 50 Hz
Amperage draw	8.8 AC amps
Restrike time	instant
Power supply	main power or 2.0 kVA generator
Envelope options	multiple envelope colors, without reflector or with reverse reflector

\* Under normal conditions of use

## safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Electrical protection	integrated fuse + breaker

**Airstar America Inc.**

Tel: 1 (800) 217-9001

[www.airstar-light.us](http://www.airstar-light.us)

**AIRSTAR**