


# sirocco 120 W LED / 12,300 lm / 48 V

## pro-pack version



## lighting data

Open core area lighting requirement (.5 fc U.S.)	3,425 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (10 fc U.S.)	205 ft <sup>2</sup>
Light under the balloon (7.6 ft high)	24 fc
Maximum lumen	12,300 lm
Color temperature: neutral	4,750 K

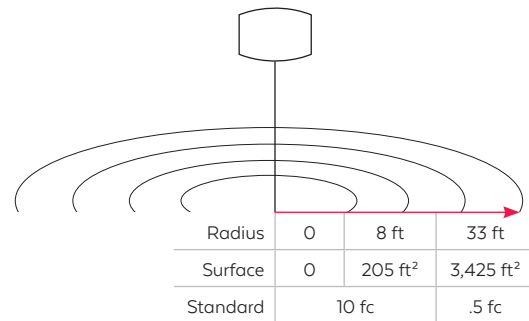

## pro-pack contents



## technical data

Light source	12 x 10 W LED			
Average LED life*	40,000 h			
Efficiency	100 lm/W			
LED configuration	10 W LED COB			
Maximum power	125 W			
Available voltage	48 V DC			
Dimmable	100 %	66 %	33 %	flash mode
Battery lifetime	4 h	6 h	12 h	24 h
Restrike time	instant			
Power supply	battery - lithium 48 V			
Envelope options	multiple envelope colors, without reflector or with reverse reflector			
Accessories	120 V power adapter			

\* Under normal conditions of use

## dimensions and packaging

Envelope size	ø 23.6 in / h 17.7 in
Stand height	7.5 ft
Net weight of the balloon	7 lbs

### Pro-pack version (handle and wheels)

Case dimensions	L 26 x w 21 x h 11 in
Contents: full set LED lighting balloon with pro case, stand, battery, charger, user manual, 1 repair patch kit	
Net weight with stand	44 lbs

## safety

Flame-retardant fabric

Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution



**Airstar America Inc.**  
Tel: 1 (800) 217-9001  
[www.airstar-light.us](http://www.airstar-light.us)

  
**aIRSTAR**