

# sirocco 400 W LED / 50,000 lm

## standard version




## dimensions and packaging

Envelope size	ø 36 in / h 24 in
P500TA stand height	from 5 to 18 ft
Net weight of the balloon	15.4 lbs
<b>PVC cylinder case</b>	
Cylinder case dimensions	L 39.4 x w 10.24 in
Content: full set lighting balloon with LED (without stand), 1 user manual, 1 glove, 1 repair patch kit	
Net weight without stand	22 lbs

## lighting data

Open core area lighting requirement (.5 fc U.S.)	12,450 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (10 fc U.S.)	620 ft <sup>2</sup>
Light under the balloon (13 ft high)	25.5 fc
Maximum lumen	50,000 lm
Color temperature: daylight	6,000 K

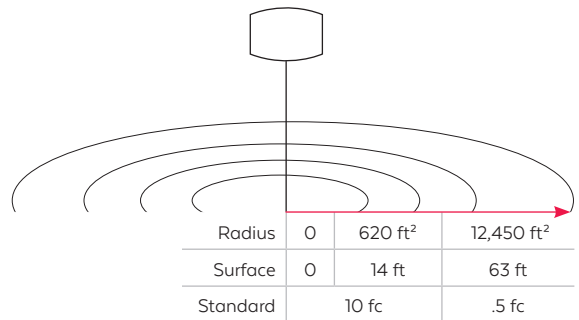

## technical data

Light source	4 x 100 W LED
Average LED life*	50,000 h
Efficiency	125 lm/W
LED configuration	4 x independent panels [Driver + LED] Quick and easy to replace (4 screws)
Maximum power	400 W
Available voltage	110-220 V / 50-60 Hz, 24 V DC
Amperage draw	5.4 AC amps / 19 DC amps
Restrike time	instant
Power supply	main power or 1 kVA generator
Envelope options	multiple envelope colors, without reflector or with reverse reflector

\* Under normal conditions of use

## safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	
Electrical protection	fuse

**Airstar America Inc.**

Tel: 1 (800) 217-9001

[www.airstar-light.us](http://www.airstar-light.us)

