


# sirocco 600 W LED / 75,000 lm

## standard version



## lighting data

Open core area lighting requirement (.5 fc U.S.)	20,100 ft <sup>2</sup>
Very low risk area lighting requirement for safety and security (10 fc U.S.)	1,385 ft <sup>2</sup>
Light under the balloon (13 ft high)	54.8 fc
Maximum lumen	75,000 lm
Color temperature: daylight	6,000 K

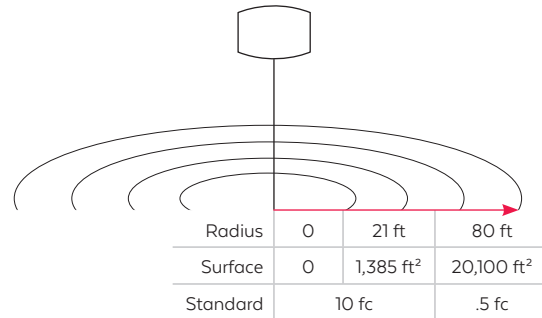

## dimensions and packaging

Envelope size	ø 43.5 in / h 24 in
P500TA stand height	from 5 to 18 ft
Net weight of the balloon	20 lbs
<b>PVC cylinder case</b>	
Cylinder case dimensions	L 39.4 x w 10.24 in
Content: full set lighting balloon with LED (without stand), 1 user manual, 1 glove, 1 repair patch kit	
Net weight without stand	25 lbs

## technical data

Light source	6 x 100 W LED
Average LED life*	50,000 h
Efficiency	125 lm/W
LED configuration	6 x independent panels [Driver + LED] Quick and easy to replace (4 screws)
Maximum power	600 W
Available voltage	110/120 - 220/240 V / 50 Hz
Amperage draw	5.8 AC amps
Restrike time	instant
Power supply	main power or 1 kVA generator
Envelope options	multiple envelope colors, without reflector or with reverse reflector

\* Under normal conditions of use

## safety

Flame-retardant fabric	
Silver internal reflector improves lumens below the balloon, increases light to the work area and reduces light pollution	
Rain and dust proof material	IP54
Electrical protection	integrated fuse + breaker
Eye protection	Pressure sensor



**Airstar America Inc.**  
Tel: 1 (800) 217-9001  
[www.airstar-light.us](http://www.airstar-light.us)

**AIRSTAR**