

# NEO PAD 6 x 4

**NEW**

## Air

### Technical data

Light source	LED RGBAwWcW
CCT	2,800 K to 6,500 K
CRI	96>98
TCLI	98+
LED lifetime	50,000 hrs
Power supply (PSU)	110-240 VAC   50-60 Hz
Nb Power supply unit	1
Power supply dimensions	14 x 6 x 3 in / 37 x 15 x 7 cm
Power supply weight	12.5 lbs / 5.7 kg
Power consumption	450 W
IP Protection	IP65
Noise level	Noiseless
Mesh network balloons	109 yd (100 m) between each pad



#### Light controls

- > via the **control panel**
- > Remotely via the **Airstar Light app**
- > **DMX**
  - DMX profiles available for major control surfaces
  - DMX connectors & **CRMX**



### Airstar Light App

Control your balloons easily and remotely!



- Control up to 250 balloons
- 8 light animations available






### Packaging

Shock-proof wheel case  
 Dimensions: 31 x 18 x 13 in  
 81 x 47 x 35 cm  
 Transport gross weight: 50 lbs (23 kg)

### Included accessories

Skirt, Stand mounting kit,  
 DOP Choice SnapGrid (Optional)




### Pad

Pad dimensions	6 x 4 x 0.6 ft / 190 x 130 x 15 cm
Volume	628.6 ft <sup>3</sup> / 17.8 m <sup>3</sup>
Net weight of the pad	20 lbs / 9 kg
Certifications	CE, IP65



### Illumination

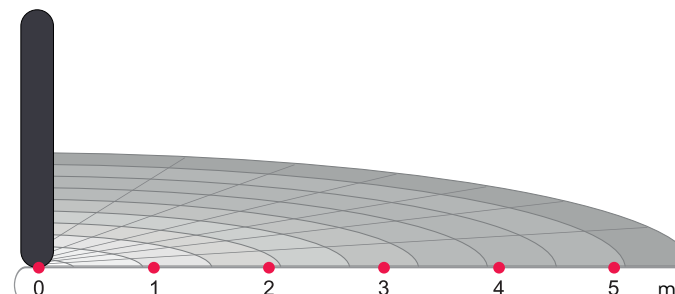

<b>3,200 K</b>	1250	1250	338	125	67.3	38.7 lux
	116.1	116.1	31.4	11.6	6.2	3.6 fc
<b>5,600 K</b>	1340	1340	362	136	74.2	42.8 lux
	124.5	124.5	33.6	12.6	6.9	4.0 fc